




# OLS

The sensor for optical line guidance


**SICK**  
Sensor Intelligence.

## Reliable lane detection

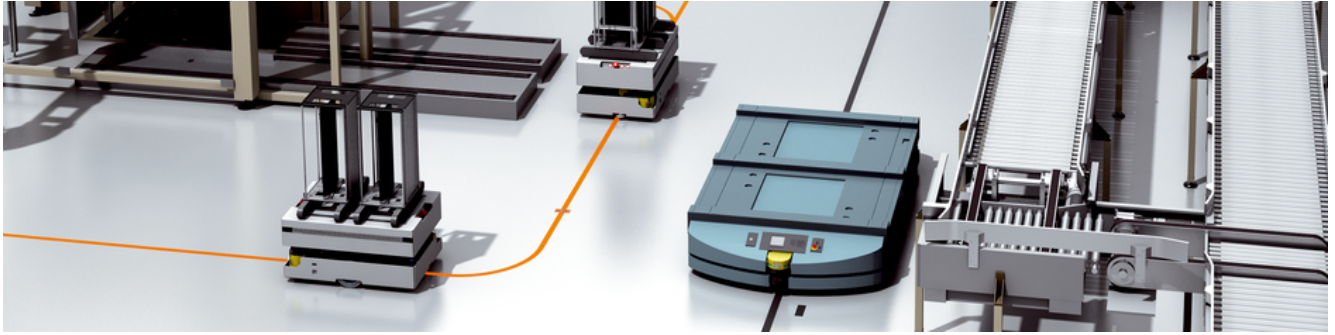


## The rugged solution thanks to luminescence

Based on the luminescence principle, the OLS optical line guidance sensor offers increased ruggedness. The OLS can be used with one and the same lane regardless of the surface type and stably detects the lane even when soiled or slightly damaged. This reduces maintenance costs and downtimes of the vehicles.

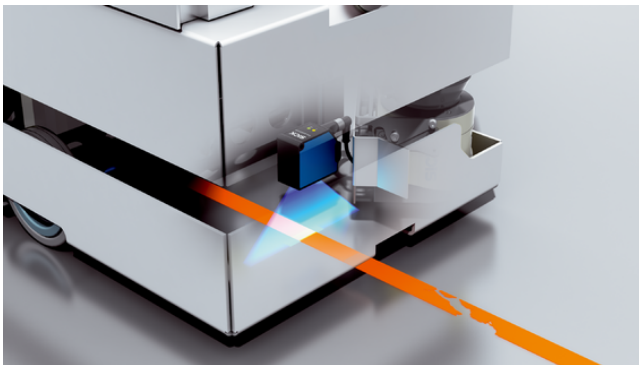

The rugged line guidance sensor detects the lane even when slightly damaged or soiled

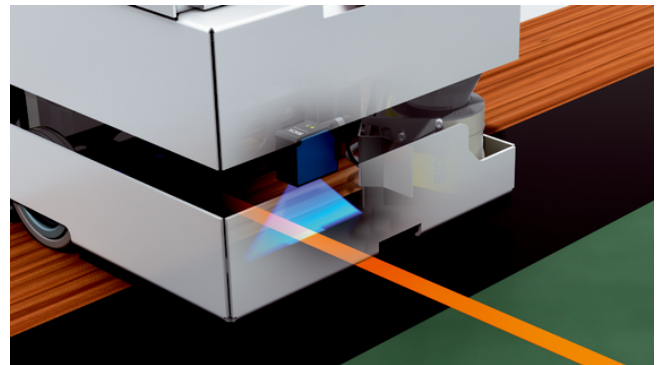

The OLS stably and reliably detects the lane regardless of the surface type




**Reliable lane detection, able to withstand contamination and damage: The OLS offers more process reliability thanks to luminescence technology.**

## Fully flexible




## Flexible line guidance through large reading field and 1D code reading function

Thanks to its large reading field of 180 mm, the OLS is able to stably master curved trajectories even at high speeds and small radii. Even for lane branches or merges it can read up to three lanes. The 1D code reading function allows positioning based on landmarks or the transmission of route commands.

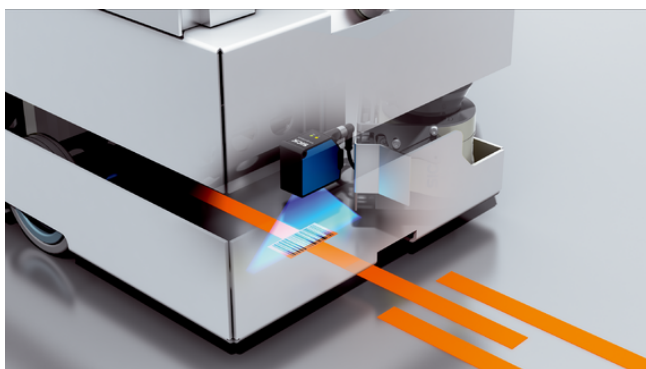

The OLS reads up to three lanes simultaneously and outputs the lane midpoint and lane width. This enables it to correctly detect the branching of a lane or merging of several lanes

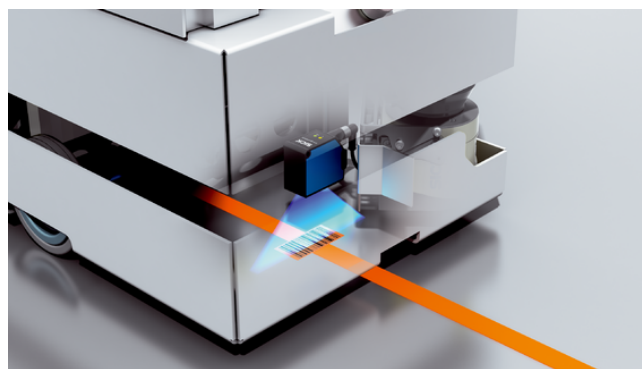

The sensor reads 1D codes without difficulty while passing over them, and transmits the four-digit numeric value in the process data to the controller. This makes the use of additional RFID tags unnecessary



**Fully flexible line guidance thanks to the large reading field; the simultaneous detection of up to three lanes and the 1D code reading function make further landmarks unnecessary and save time in routing.**



### Technical data overview

<b>Communication interface</b>	IO-Link CANopen Modbus (depends on variant)
<b>Dimensions (W x H x D)</b>	31 mm x 62 mm x 52.5 mm
<b>Sensing distance</b>	100 mm
<b>Type of light</b>	LED <sup>1)</sup> Visible blue light LED <sup>1)</sup> Ultraviolet light
<b>Switching output</b>	Push-pull: PNP/NPN
<b>Connection type</b>	Plug, M12, 5-pin

<sup>1)</sup> Average service life: 100,000 h at T<sub>U</sub> = +25 °C.

### Product description

The OLS is a line guidance sensor based on luminescence technology. It detects conventional luminescent adhesive tape regardless of the background, contamination or surface defects and reliably outputs the deviation from the center of the lane. Lane shifts can be made flexibly with adhesive tape and are also possible in small curve radii of up to 0.5 m. In addition, the OLS offers the option of reading 1D codes and thus transmitting various pieces of route information and drive commands in the event of an overrun. A CANopen, RS-485 or IO-Link interface enable simple installation and commissioning. The OLS is therefore the most cost-effective solution for line guidance with a focus on ruggedness and flexibility.

### At a glance

- Detection of luminescent adhesive tape
- Very high signal-to-noise ratio (~1:1,000)
- 180 mm reading field (up to 3 lanes can be read)
- Output of deviation from lane center point, lane width and read-out of barcodes
- Able to withstand ambient light, contamination and gloss
- Compensation for surface defects
- Measurement accuracy: ± 1 mm
- CANopen, RS-485 or IO-Link

### Your benefits

- Rugged and accurate, insensitive to ambient light, contamination or surface defects
- Independent of base material or color
- Simple line shifts and route changes by attaching conventional adhesive tape
- Small curve radii of up to 0.5 m possible
- Large reading field enables flexible line shifts (branches, junctions)
- Reading bar codes makes it possible to transmit distance information or drive commands and simplifies vehicle control
- Cost efficient compared to camera solutions
- Low installation costs

### Fields of application

- Detection of luminescent adhesive tape
- Very high signal-to-noise ratio (~1:1,000)
- 180 mm reading field (up to 3 lanes can be read)
- Output of deviation from lane center point and read-out of barcodes
- Able to withstand ambient light, contamination and gloss
- Compensation for surface defects
- Measurement accuracy: ± 1 mm
- CANopen, RS-485 or IO-Link

## Ordering information

Other models and accessories → [www.sick.com/OLS](http://www.sick.com/OLS)

- **Communication interface:** IO-Link, CANopen
- **Light source:** LED
- **Sensing distance:** ≤ 100 mm
- **Switching output:** push-pull: PNP/NPN
- **Light spot size:** 180 mm x 9 mm
- **Connection type Detail:** Plug, M12, 5-pin

Bar code types	Track color	Type	Part no.
2/5 Interleaved with checksum	Orange	OLS20-BB1114342	1113053
	Orange, green, yellow	OLS20-UB1114340	1118557
Interleaved 2 of 5	Orange	OLS20-BB1114142	1095594
	Orange, green, yellow	OLS20-UB1114140	1132098
	Blue	OLS20-BB1114149	1103483

- **Communication interface:** IO-Link, Modbus
- **Light source:** LED
- **Sensing distance:** ≤ 100 mm
- **Switching output:** push-pull: PNP/NPN
- **Light spot size:** 180 mm x 9 mm
- **Connection type Detail:** Plug, M12, 5-pin

Bar code types	Track color	Type	Part no.
2/5 Interleaved with checksum	Orange	OLS20-BB1118342	1113054
	Orange, green, yellow	OLS20-UB1118340	1108045
Interleaved 2 of 5	Orange	OLS20-BB1118142	1100421
	Orange, green, yellow	OLS20-UB1118140	1132097

## SICK AT A GLANCE

SICK is one of the leading manufacturers of intelligent sensors and sensor solutions for industrial applications. A unique range of products and services creates the perfect basis for controlling processes securely and efficiently, protecting individuals from accidents and preventing damage to the environment.

We have extensive experience in a wide range of industries and understand their processes and requirements. With intelligent sensors, we can deliver exactly what our customers need. In application centers in Europe, Asia and North America, system solutions are tested and optimized in accordance with customer specifications. All this makes us a reliable supplier and development partner.

Comprehensive services complete our offering: SICK LifeTime Services provide support throughout the machine life cycle and ensure safety and productivity.

For us, that is “Sensor Intelligence.”

## WORLDWIDE PRESENCE:

Contacts and other locations –[www.sick.com](http://www.sick.com)